

## JBF HD 38/50 FLASH

### Important features

- Three-phase version for operation on a CEKON CEE 32A outlet
- Matches through 900 mm / 36" office doors
- Main cutting unit shreds HDD's, CD's, DVD's, magnet tapes, smartphones,...
- Auxiliary cutting unit shreds FLASH-media like thumb drives, SD-cards, ...
- Main cutting unit complies depending on the installed screen with security levels H3 up to H6 according to DIN 66399
- Auxiliary cutting unit complies depending on the installed screen with security levels E3 up to E5 according to DIN 66399 and British CPNI

#### Range of application

This machine was designed for Shredding-Service providers, banks and governmental institutions with high up to paramount security demand. Exchangeable screens on both cutting units allow for fast and cost efficient adaptation of the security class for various shredding jobs or in case of change of shredding standards.

#### Technical data

Power supply V / Hz 400V / 50Hz / 3Ph (other voltages available upon request)

Main drive kW 4

#### Common technical data

 Cutting zone 1
 mm
 380 x 500

 Knife width 1
 mm
 31,5


 Feed slot 2
 mm
 62 x 44

 Knife width 2
 mm
 5,8

Dimensions mm 1,616 x 885 x 1,555 high

Weight kg 1,000 Collecting volume Liter 130

#### Various FLASH-screens










# JBF HD 38/50 FLASH



Feeding main cutting unit Fe

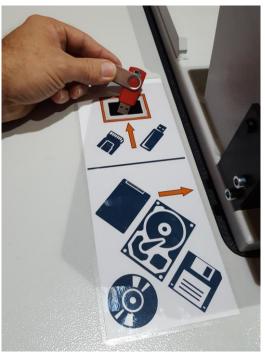

Feeding auxiliary FLASH cutting unit



Cutting result HDD 6 mm screen



Cutting result FLASH 4 mm screen



